


A premium flush mount access panel cover for a 6" x 6" opening. This cover fits into a 6" x 6" drywall opening and provides an accessible area of 4.375" x 4.375".

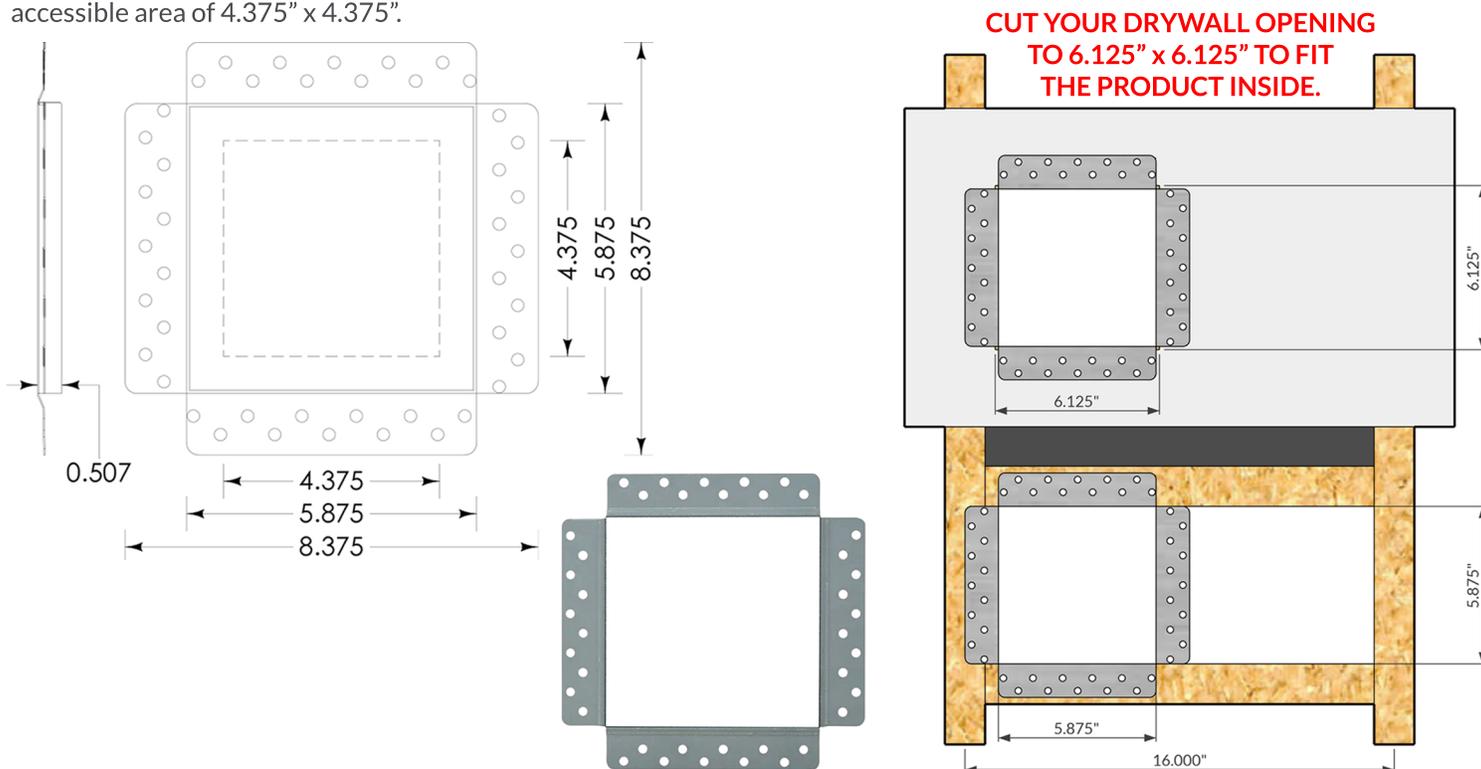

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic, removable, triple fibre reinforced cement board panel.
- 24 Gauge galvanized satin coated steel frame with beaded edge.
- 4 Rare earth magnets (0.25" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- Made from noncombustible material.
- Impact resistance.
- Moisture and water resistant, mold resistant.
- Eco-friendly manufacturing and non-hazardous material.

PRODUCT SPECIFICATIONS

- 19.14 square inches (123.5 square centimeters) of accessible area.
- Overall dimensions: 8.375" x 8.375" x 0.507" (213mm x 213mm x 12.9mm).
- Drywall opening required: 6.0" x 6.0" (152mm x 152mm).
- Accessible area: 4.375" x 4.375" (111mm x 111mm).
- Product weight is 0.86 lbs (0.39 kg).

MATERIAL SPECIFICATIONS

- Raw Material: Cement, fibres, quartz sand, non-hazardous filler.
- Density: $1.0 < D \leq 1.2 \text{ g/cm}^3$.
- Asbestos Content: 100% asbestos-free.
- Noncombustible as determined by ASTM E2652.
- Water Absorption: $\leq 40\%$.
- Resistant Bending Strength: $\geq 10.5 \text{ MPa dry}$.
- Linear Variation with Humidity (50%-90% RH): $\leq 0.25\%$.
- Freeze and Thaw Cycles: No distortion after 25 repeated cycles.

