
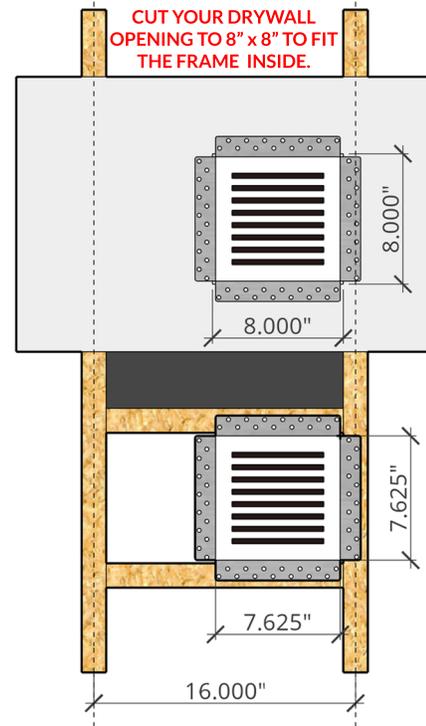


A premium flush mount exhaust fan cover for a 8"x8" drywall opening. This cover can also be used as a cold air return, and yields a 6.125"x6.125" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

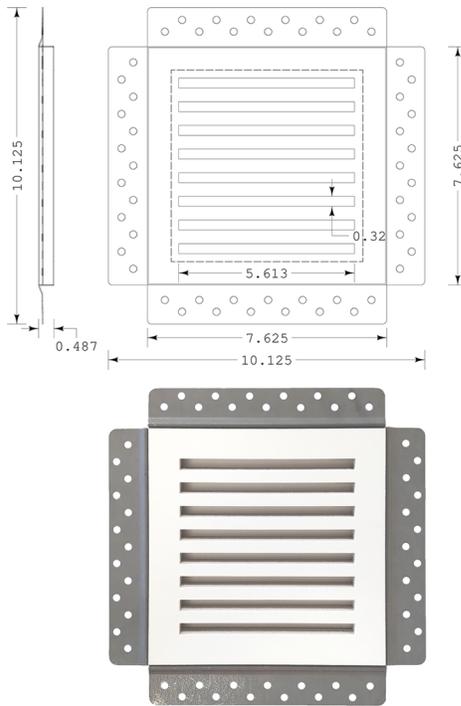

## APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

## FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.250" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled slots for directional venting and to hide a fan.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

## PRODUCT SPECIFICATIONS

- Over 14.36 square inches (92.64 square centimeters) of open area.
- Slot Size: 5.613" x 0.32 (142.5mm x 8.12mm).
- 8 angled horizontal slots.
- Overall dimensions are 10.125" x 10.125" x 0.5" (257.17mm x 257.17mm x 12mm).
- Product weight is 1.2 pounds (0.54 kilograms)

## MATERIAL SPECIFICATIONS

- Raw Material - Magnesium sulphate cement, plant fibre, glass fibre cloth, perlite
- Density - 0.95 g/cm<sup>3</sup>
- Water Content - 12%
- Chloride Ion Content - 0%
- Formaldehyde Release - 0%
- Asbestos Content - 0%
- Fire resistance: Incombustibility A1 Class (GB 8624-2006/EN 13501-1)
- Water Absorption - 27%
- Resistant Bending Strength - 8 MPa
- Impact Resistance - 1.5 J/m
- Nail-Withdrawal strength - 16 N/mm
- Water Permeability - No water vapour after 24 hours' test
- Refractoriness (Pyrometric cone Test) - 4H
- pH Value - 6.7{8.0}
- Thermal conductivity - 0.2 W/(mK)
- Moisture Movement - 0.25 %
- Heat Shrinkage Rate - 0.05
- Freeze Thaw - No distortion after 25 repeated cycles of freezing and thawing.

