
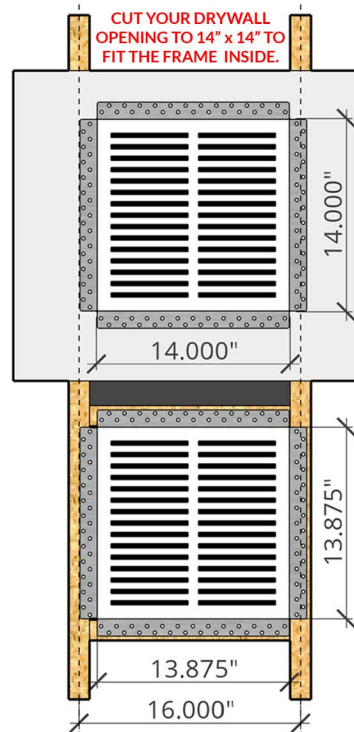


A premium flush mount exhaust fan cover for a 14"x14" drywall opening. This cover can also be used as a cold air return, and yields a 12.25"x12.25" accessible area. (NOTE: your exhaust fan and/or motor needs to fit through this area).

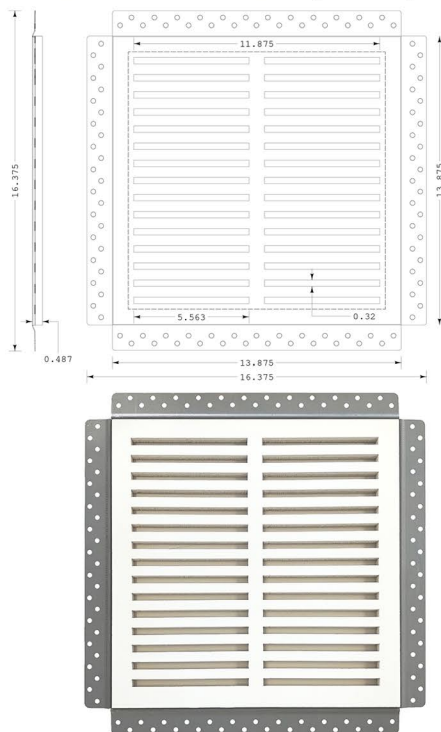

APPLICATION

- Designed for 1/2" and 5/8" thick drywall.
- Suitable for both wall and ceiling installation.
- Screws on to the face of your drywall.
- Once finished seaming over the flange, the product is ready to be primed and painted to your wall colour.
- The inserts comes primed white and ready for your paint colour.

FEATURES

- Magnetic removable triple fibre reinforced cement board grill.
- 24 gauge galvanized satin coat steel frame complete with a beaded edge and adjustable diffuser.
- 4 rare earth magnets (0.375" diameter x 0.060" thick).
- Easy installation, primed and ready to paint.
- 20 degree angled slots for directional venting and to hide a fan.
- Fire Rated, non-flammable.
- Impact Resistant.
- Moisture and Water Resistant, Mold Resistant.
- Eco-Friendly Manufacturing and Non-Hazardous.

PRODUCT SPECIFICATIONS

- Over 53.4 square inches (344.5 square centimeters) of open area.
- Slot Size: 5.563" x 0.32 (141.3mm x 8.12mm).
- 30 angled horizontal slots.
- Overall dimensions are 16.375" x 16.375" x 0.5" (415.9mm x 415.9mm x 12mm).
- Product weight is 2.86 pounds (1.3 kilograms)

MATERIAL SPECIFICATIONS

Raw Material: cement, fibres, quartz sand, non-hazardous fillers
 Density: $1.0 < D \leq 1.2 \text{ g/cm}^3$
 Asbestos Content: 100% asbestos-free
 Fire resistance: non-combustible
 Water Absorption: $\leq 40\%$
 Resistant Bending Strength: $\leq 10.5 \text{ MPa}$ dry
 Moisture Movement: 0.25 %
 Freeze Thaw: No distortion after 25 repeated cycles of freezing and thawing

